


# UPLIGHT One BF

Intelligent office light



- ✓ Glare free UGR ≤ 10, beam angle: 52°
- ✓ Light ratio top and bottom separately adjustable
- ✓ Daylight sensor for light temperature control
- ✓ Distance sensor
- ✓ Presence sensor
- ✓ >36.000 h Working Lifetime
- ✓ Dimmable by touch
- ✓ Four settings selectable



<b>CRI</b> >80	<b>h</b> >30.000	<b>h</b> >30.000
3000 K 4000 K 5000 K 6000 K	<b>UGR</b> <10	<b>lm</b> 6500

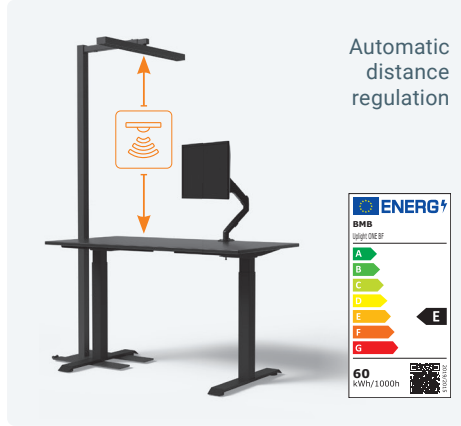

## Details

Light source	LED
Lighting effect	145 lm/W
Protection Level	IP 20
UGR	<10
CRI (Ra>)	≥80
Luminous flux	≥8500 lm
Luminous ratio	30/70% top/bottom
Beam angle	top 112°, bottom 52°
Light color	3000k, 4000k, 5000k, 6000k
Energy consumption	max. 60 W
Standby	0,5 W
Input voltage	AC 220-240V 50/60Hz
Power factor	>0,9
Working lifetime (hour)	>36.000 h
Working temperatur	-20° - 40°
Cable length	180 cm

## Technical drawings

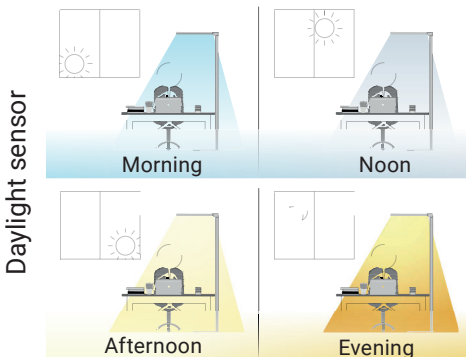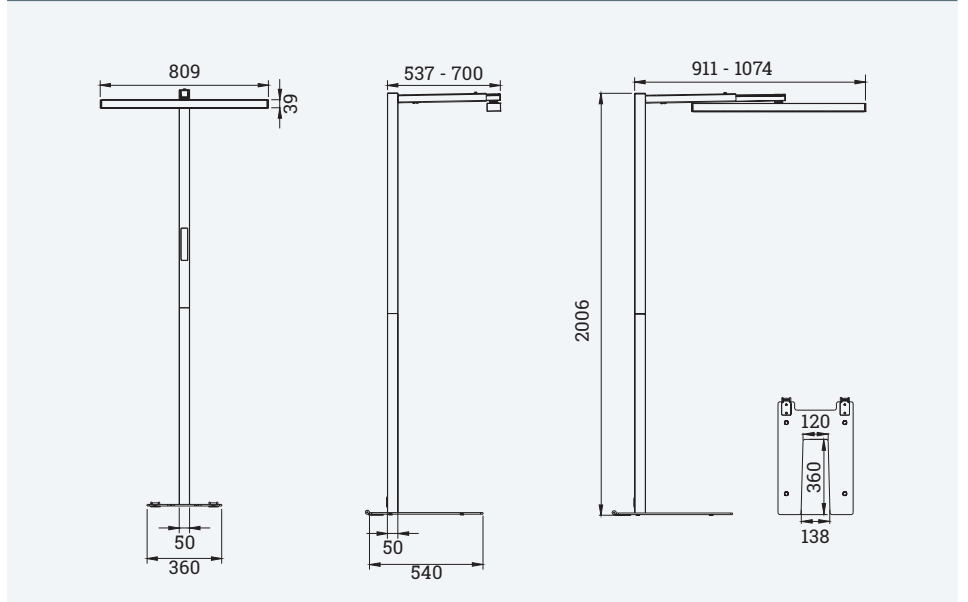

Article	Description	Colour	Item No.
UPLIGHT One BF	Intelligent office light, Biodynamic office lighting, glare free	RAL 9005, Jet black	331 129365
		RAL 7016, Anthracite grey	331 129386
		RAL 9006, White aluminium	331 129372
		RAL 9003, Signal white	331 129379

